



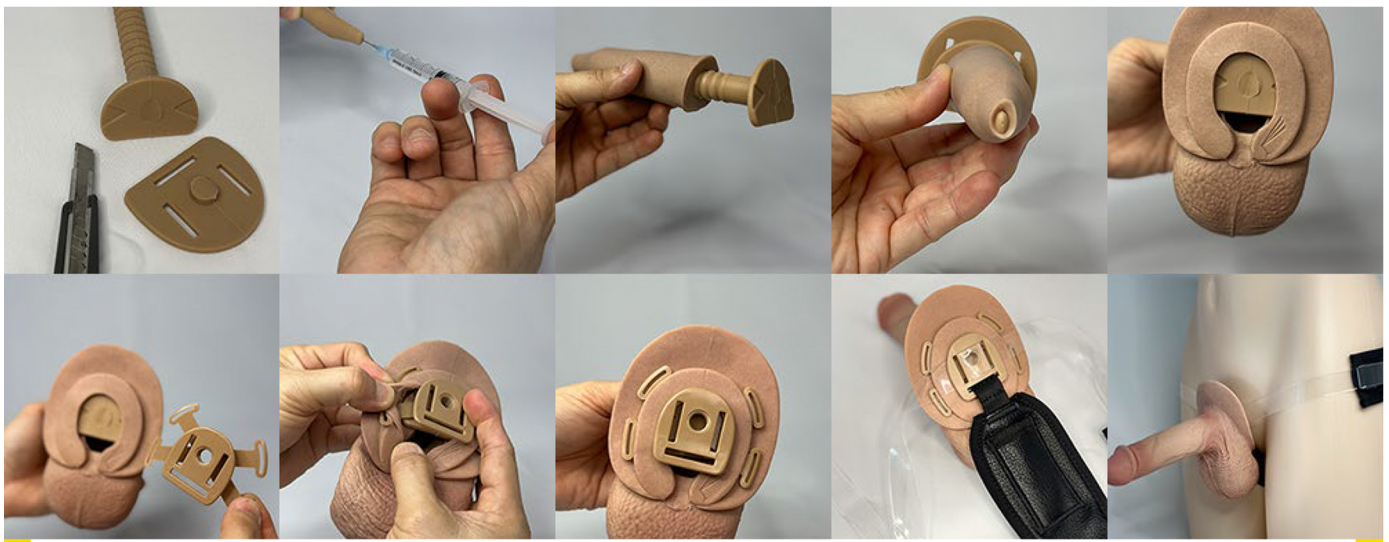

DIRECTIONS FOR USING THE GEN5 EJACULATION ROD USING WITH CLIP HARNESS

1. Use a pen knife to cut off the base (with vertical and horizontal openings) of the Gen5 Ejaculation Rod.
2. Inject your choice liquid (e.g., water) into the tip using a syringe and needle (not included).
3. Cut off 2mm of the sealed tip of the PeeCock Gen5 Core and insert the Gen5 Ejaculation Rod into the hollow section of the Core until the tip of the Rod is exposed. (Tip: Rub a small amount of water-based lube on the rod for easy insertion into the core)
4. Position the small base of the Gen5 Ejaculation Rod onto the U tab of the PeeCock Gen5.
5. Slide the bottom loop of the nylon strap through the horizontal opening on the FLY Clip and lock it securely by inserting the plastic pin through the loop.
6. Thread both ends of the front nylon strap or Clear Strap through the left and right vertical openings on the FLY Clip respectively.
7. Attach the FLY Clip onto the U tab of the PeeCock by placing the bottom left ear loop into the bottom left opening on the U tab.
8. Rotate clockwise to achieve a secure fit by passing the FLY Clip through all four openings on the U tab.
9. Fasten both ends of the nylon strap or clear strap to the back waist nylon strap using the convenient clip and lock system on the left and right end.
10. Wear the Clip Harness like any regular underwear.
11. Adjust the position of the PeeCock to rest comfortably at your pubic region.
12. The PeeCock Gen5 is now ready to use for Play.

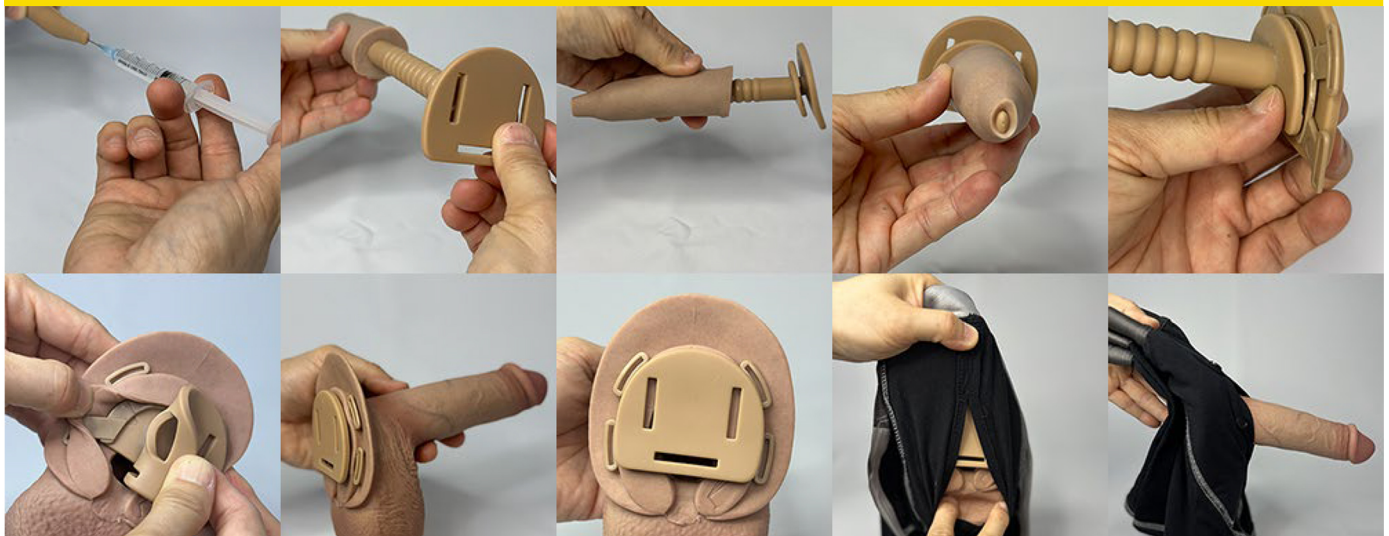

DIRECTIONS FOR USING THE GEN5 EJACULATION ROD USING WITH UNDERWEAR HARNESSES

1. Inject your choice liquid (e.g., water) into the tip using a syringe and needle (not included).
2. Cut off 2mm of the sealed tip of the PeeCock Gen5 Core and insert the Gen5 Ejaculation Rod into the hollow section of the PeeCock Gen5 Core until the tip of the Rod is exposed. (Tip: Rub a small amount of water-based lube on the rod for easy insertion into the core).
3. Position the small base of the Gen5 Ejaculation Rod onto the U tab of the PeeCock.
4. Secure the Gen5 Ejaculation Rod in place by placing the U Clip on top of the small base and attach the U Clip onto the U tab of the PeeCock. Lock the bottom left ear loop into the bottom left opening on the U tab.
5. Rotate clockwise to achieve a secure fit by passing the U Clip through all four openings on the U tab.
6. Place the PeeCock Gen5 into the front pouch of any PeeCock Underwear Harnesses (e.g., Brief, Boxer, and Button Fly Boxer).
7. Adjust the position of the PeeCock to rest comfortably at your pubic region.
8. The PeeCock Gen5 is now ready to use for Play.



*GEN5 EJACULATION ROD
INSTRUCTION GUIDE*