

# PEECOCK GEN5



## Description

- 1 – PeeCock Gen5 Skin
- 2 – PeeCock Funnel System
- 3 – PeeCock Gen5 Core
- 4 – U Clip
- 5 – Gen5 Erection Rod System
- 6 – Floating Testicles Sac
- 7 – Transparent Harness



## PLAY

1. Insert the Floating Testicles Sac into the scrotum sac of the PeeCock Gen5 Skin.
2. Insert the Gen5 Erection Rod System into the Core. Ensure proper alignment by referring to Fig. b for the correct direction.
3. If you plan to use the Clip Harness with the FLY Clip, consult the Clip Harness Attachment Guide for setup instructions before proceeding to the next step.
4. Insert the Core with Gen5 Erection Rod System into the shaft of the PeeCock Gen5 skin.
5. Secure the FLY Clip onto the U tab of the PeeCock Gen5.
6. For alternative attachment methods, refer to the Attachment Guide for details on securing your PeeCock Gen5. You may also consider using PeeCock Underwear Harnesses for added support.

## PLEASURE

1. To attach the PeeCock Pleasure System (Breaker, Stroker or Bullet Vibe), it is mandatory to use the Clip Harness.
2. Refer to the PeeCock Pleasure System Guide for detailed step-by-step instructions on setting up and attaching the PeeCock Pleasure System.


## PACK

1. Insert the Floating Testicles Sac into the scrotum sac of the PeeCock Gen5 Skin.
2. Gently insert the Core into the shaft of the PeeCock Gen5 skin.
3. Secure the U Clip onto the U tab of the PeeCock Gen5, ensuring the logo is facing up.
4. Take one end of the transparent elastic strap and thread it through the top right ear loop of the U Clip, guiding it into the top left ear loop.
5. Fasten the loose end of the Transparent Harness into the metal ring, ensuring a secure connection. Fine-tune the position of the PeeCock Gen5 to rest comfortably at your pubic region.

## PEE

1. Insert the Floating Testicles Sac into the scrotum sac of the PeeCock Gen5 Skin.
2. Secure the U Clip onto the U tab of the PeeCock Gen5, ensuring the logo is facing up.
3. Carefully insert the Funnel System into the shaft of the PeeCock Gen5 skin. Position the funnel cup according to the illustration in Fig. a.
4. Take one end of the transparent elastic strap and thread it through the top right ear loop of the U Clip, guiding it into the top left ear loop.
5. Secure the loose end of the Transparent Harness into the metal ring, ensuring a secure connection.



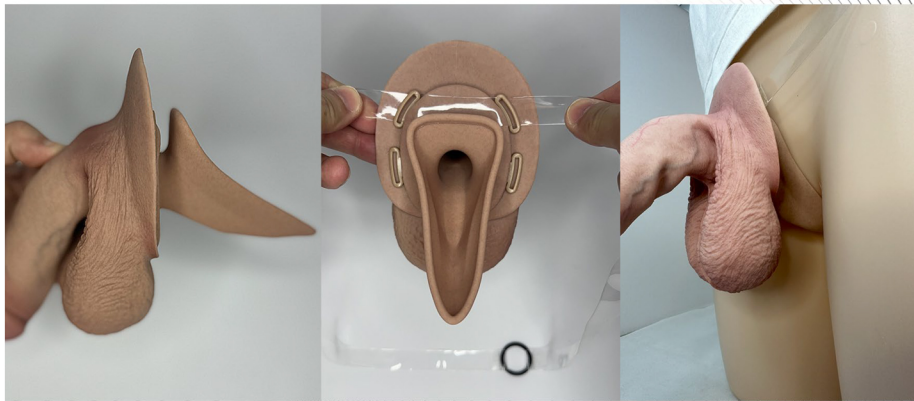

## How to STP with the PeeCock Funnel System:

1. Undo your trousers and pull down your underwear at the front pouch. Position the cup against your body, ensuring the pee hole is aimed directly into the hole opening on the funnel.
2. Stand with your legs apart and lean slightly forward. Extend the PeeCock shaft and point it downwards, directing urine into the urinal.
3. When finished, push the funnel cup upwards to expel the last drops. Hold the shaft and shake it a few times to eliminate any excess urine.
4. Tuck the PeeCock shaft back into your pants and walk tall!

## Tips for Optimal Usage:

1. Familiarize yourself with the best position by practicing in the shower.
2. Position the back pointy-end of the funnel more firmly against you than the front, ensuring a smooth downward urine flow.
3. Maintain a high level of hygiene by using anti-bacterial wet wipes to clean the surface of the funnel after each use.
4. Wash the PeeCock and funnel with mild anti-bacterial soap every day to ensure cleanliness and optimal performance.

## Cleaning & Care

1. Before cleaning the PeeCock, ensure all attached parts (e.g., Core, Floating Testicles Sac, Funnel System) are removed.
2. Clean the PeeCock and all its components daily, or after each use, using mild antibacterial soap and clean water.
3. Clean gently, avoiding harsh scrubbing.
4. Towel dry or allow the PeeCock and its components to air dry completely before storing them away or using them again.

## Condoms & Lube

1. For your safety and that of your partner, the use of a condom is essential during the use of the PeeCock. This practice not only reduces the risk of sexually transmitted diseases but also helps maintain the cleanliness and optimal condition of the device.
2. When using a condom with the PeeCock, ensure that it contains water-based lubricant. Condoms with silicone lubricants are not suitable, as they can potentially damage the PeeCock.



## Attachment – Pack Harness

1. Insert the bottom loop through the horizontal opening on the FLY Clip.
2. Secure it by placing the plastic pin through the loop. (see Fig. 2a)
3. Attach the FLY clip onto the U tab of the PeeCock.
4. Thread one end of the transparent elastic strap through the top right ear loop of the FLY Clip and into the top left ear loop as illustrated in Fig. 2b.
5. Secure the loose end of the transparent elastic strap into the metal ring that holds the black elastic waistband. (see Fig. 2c)
6. Adjust the position of the PeeCock to rest at your pubic region.

## Attachment – Velcro

1. Paste the hook side of the Velcro tape onto the FLY clip. Press and hold for 10 sec. Attach the FLY clip onto the U tab of the PeeCock. (see Fig. 3a)
2. Shave the pubic hair around your pubic region where the PeeCock will be attached.
3. Paste the clear waterproof adhesive tape onto the shaved pubic region. Press and hold for 10 sec. (see Fig. 3b)
4. Paste the loop side of the Velcro tape onto the clear adhesive tape at your pubic region. Press and hold for 10 sec.
5. Attach the PeeCock onto the Velcro tape at your pubic region.

## Attachment – Medical Adhesive

1. Attach the FLY clip onto the U tab of the PeeCock. (see Fig. 4a)
2. Shave the pubic hair around your pubic region where the PeeCock will be attached.
3. Apply a thin layer of adhesive to cleaned, dry skin using a cotton swab. Wait about 20-30 seconds until the adhesive turns clear and tacky. Repeat this process with a second layer.
4. Once the second layer is dry, position the PeeCock in the correct position and hold it firmly for 10 seconds. (see Fig. 4b). Congratulations, your PeeCock is now securely attached.

## Attachment – Clip Harness

1. Slide the bottom loop of the nylon strap through the horizontal opening on the FLY Clip and secure it with the plastic pin. (see Fig. 2a)
2. Thread both ends of the front nylon strap through the left and right vertical openings on the FLY Clip respectively as illustrated in Fig. 2d.
3. Attach the FLY clip onto the U tab of the PeeCock.
4. Fasten both ends of the nylon strap to the back waist nylon strap using the convenient clip and lock system on the left and right end. (see Fig. 2e).
5. Wear the harness like regular underwear and adjust the PeeCock to rest comfortably at your pubic region.